

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 136 269 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
26.09.2001 Bulletin 2001/39

(51) Int Cl.7: B41J 2/14, B41J 2/16

(21) Application number: 01104029.2

(22) Date of filing: 20.02.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Kanda, Torahiko
Minato-ku, Tokyo (JP)
• Ohno, Kenichi
Minato-ku, Tokyo (JP)
• Otsuka, Yasuhiro
Minato-ku, Tokyo (JP)

(30) Priority: 21.03.2000 JP 2000078898

(71) Applicant: NEC CORPORATION
Tokyo (JP)

(74) Representative: VOSSIUS & PARTNER
Siebertstrasse 4
81675 München (DE)

(54) Ink jet head having a plurality of units and its manufacturing method

(57) An ink jet head is constructed by a plurality of combined units (101b-1, 101b-2) comprising the steps of:

forming a plurality of units (101b) in a substrate (102);

separating said units from each other; and

forming one ink jet head by combining at least two of said units,

wherein each of said units comprises:


a first protruded abutting portion (51);

a recessed abutting portion (52) positioned at an opposite side of said first protruded abutting portion and adapted to said first protruded abutting portion;

a second protruded abutting portion (53) on the same side of said first protruded abutting portion; and

a third protruded abutting portion (54) positioned on an opposite side of said second protruded abutting portion and adapted to said second protruded abutting portion.

Fig. 9

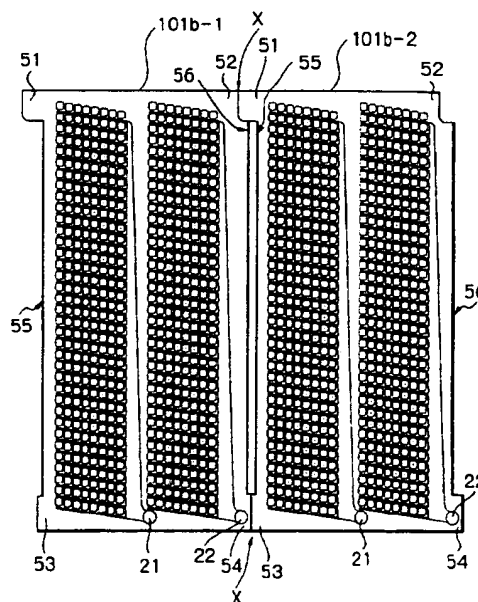

EP 1 136 269 A2

Description

[0001] The present invention relates to an ink jet head and its manufacturing method.

Description of the Related Art

[0002] A prior art ink jet head is constructed by a single unit including laminated substrates such as a monocrystalline silicon substrate and a glass substrate (see JP-A-6-218932). This will be explained later in detail.

[0003] In the above-mentioned prior art ink jet head, however, when the density of nozzles is increased to improve the printing quality while the printing speed is being increased, even if one nozzle is defective in one unit, such a unit has to be scrapped, so that the manufacturing yield of the units is decreased, thus increasing the manufacturing cost of the ink jet head.

[0004] It is an object of the present invention to provide an ink jet head and its manufacturing method capable of decreasing the manufacturing cost.

[0005] According to the present invention, an ink jet head is constructed by a plurality of combined units.

[0006] Also, in a method for manufacturing an ink jet head, a plurality of units are formed in a substrate. Then, the units are separated from each other. Finally, one ink jet head is formed by combining at least two of the units.

[0007] The present invention will be more clearly understood from the description set forth below, as compared with the prior art, with reference to the accompanying drawings, wherein:

Fig. 1 is a plan view illustrating a semiconductor wafer where prior art ink jet units are formed;

Fig. 2 is a plan view of one of the ink jet units of Fig. 1;

Fig. 3 is a cross-sectional view of the periphery of one nozzle of Fig. 2;

Fig. 4 is a plan view illustrating a semiconductor wafer where ink jet units according to the present invention are formed;

Fig. 5 is a plan view of one of the ink jet units of Fig. 4;

Fig. 6 is a partially-enlarged view of the unit of Fig. 5; Figs. 7A, 7B, 7C and 7D are cross-sectional views taken along the line VII-VII of Fig. 6;

Figs. 8A and 8B are plan views of the semiconductor wafer of Fig. 4 before and after the separation of units, respectively;

Fig. 9 is a plan view for explaining the combination of two non-defective units of Figs. 8A and 8B; and Fig. 10 is a cross-sectional view of the abutting portion of the non-defective units of Fig. 9.

[0008] Before the description of the preferred embodiment, a prior art ink jet head will be explained with reference to Figs. 1, 2 and 3.

[0009] A prior art ink jet head is formed by a single unit 101a as illustrated in Fig. 1 including laminated substrates such as a monocrystalline silicon substrate and a glass substrate (see JP-A-6-218932). For example, if each unit 101a has a size of about 27mm × 27mm, seven units 101a are cut by a dicing blade (not shown) from an about 10-cm diameter monocrystalline silicon wafer 102 as illustrated in Fig. 1.

[0010] In Fig. 2, which is a detailed plan view of each of the units 101a of Fig. 1, four nozzle columns 11, 12, 13 and 14 where nozzles 1 are closely arranged in a matrix are provided. In this case, the nozzle columns 11, 12, 13 and 14 are used for ejecting black ink, yellow ink, cyan ink and magenta ink, respectively. The nozzle columns 11, 12, 13 and 14 are connected to ink supply holes 21, 22, 23 and 24, respectively.

[0011] As illustrated in Fig. 3, which is a cross-sectional view of the periphery of one nozzle 1 of Fig. 2, one pressure chamber 2 linked to the nozzle 1, an ink passage 3 and an ink pool (reservoir) 4 are partitioned by a plurality of substrates 31, 32 and 33 made of monocrystalline silicon and glass, and a thin vibration plate 5 on which an actuator 6 made of piezoelectric material sandwiched by metal electrodes is formed. Note that the ink pool 4 for each of the nozzle columns 11, 12, 13 and 14 is comb-shaped as illustrated in Fig. 2.

[0012] Also, in Fig. 3, reference D designates an ink droplet.

[0013] In the ink jet head formed by a single unit 101a, however, when the density of nozzles is increased to improve the printing quality while the printing speed is being increased, even if one nozzle is clogged or deformed, i.e., defective in one unit 101a, such a unit has to be scrapped, so that the manufacturing yield of the units 101a is decreased, thus increasing the manufacturing cost of the ink jet head.

[0014] For example, if the nozzle 1 has a diameter of about 25 to 40 μm, the average number of defective nozzles 1 is expected to be 4 in one monocrystalline silicon wafer 102. In this case, four units 101a may be defective, so that the manufacturing yield of the units 101a in one monocrystalline silicon wafer 102 may be 3/7 (= 43percent).

[0015] An embodiment of the ink jet head according to the present invention is formed by a plurality of units 101b, for example, two units 101b as illustrated in Fig. 4 including a monocrystalline silicon substrate. For example, if each unit 101b has a size of about 27mm × 13mm, fourteen units 101b are cut by a dicing blade from an about 10-cm diameter monocrystalline silicon wafer 102.

[0016] In Fig. 5, which is a detailed plan view of each of the units 101b of Fig. 4, two nozzle columns 11 and 12 where nozzles 1 are closely arranged in a matrix are provided. In this case, the nozzle columns 11 and 12 are used for ejecting black ink (or cyan ink) and yellow ink (or magenta ink), respectively. The nozzle columns 11 and 12 are connected to ink supply holes 21 and 22,

respectively.

[0017] As illustrated in Fig. 5, in each of the units 102b, a protruded abutting portion 51, a recessed abutting portion 52, a protruded abutting portion 53 and a protruded abutting portion 54 are formed. As a result, a relief (recess) 55 is formed between the protruded abutting portions 51 and 53, and a relief (recess) 56 is formed between the abutting portions 52 and 54. Note that the protruded abutting portion 51 has the same shape as the recessed abutting portion 52.

[0018] In the ink jet head formed by two of the units 101b, if the nozzle 9 has a diameter of about 25 to 40 μ m, the average number of defective nozzles 1 is also expected to be 4 among one monocrystalline silicon wafer 102. In this case, four units 101b may be defective, so that the manufacturing yield of the units 101b among one monocrystalline silicon wafer 102 may be 3/14 (= 22 percent). Thus, the manufacturing yield can be remarkably increased as compared with the prior art units 101a.

[0019] A method for manufacturing an ink jet head according to the present invention is explained next with reference to Figs. 6, 7A, 7B, 7C, 7D, 8A, 8B, 9 and 10. Note that Fig. 6 is a partially-enlarged view of the unit 101b of Fig. 5, and Figs. 7A, 7B, 7C and 7D are cross-sectional views taken along the line VII-VII of Fig. 6. Also, Figs. 8A and 8B are plan views of the semiconductor wafer of Fig. 4 before and after the separation of units respectively. Further, Fig. 9 is a plan view for explaining the combination of two non-defective units of Figs. 8A and 8B, and Fig. 10 is a cross-sectional view of the abutting portion of the non-defective units of Fig. 9.

[0020] First, referring to Fig. 7A as well as Fig. 6, a photoresist pattern 72 is formed by a photolithography process on a front surface of a monocrystalline silicon substrate 71.

[0021] Next, referring to Fig. 7B as well as Fig. 6, the monocrystalline silicon substrate 71 is etched by a reactive ion etching (RIE) dry process using the photoresist pattern 72 as a mask. As a result, a nozzle 1 is perforated in the monocrystalline silicon substrate 71, and simultaneously, an edge 50 for the abutting portions 51, 52, 53 and 54 and the reliefs 55 and 56 is perforated. Then, the photoresist pattern layer 72 is removed.

[0022] Next, referring to Fig. 7C as well as Fig. 6, a photoresist pattern layer (not shown) is formed by a photolithography process on a back surface of the monocrystalline silicon substrate 71. Then, the monocrystalline silicon substrate 71 is etched by an anisotropy wet etching process using the photoresist pattern layer as a mask. As a result, a pressure chamber 2, an ink passage 3 and an ink pool (reservoir) 4 are perforated in the monocrystalline silicon substrate 71, and simultaneously, the edge 50 for the abutting portions 51, 52, 53 and 54 and the reliefs 55 and 56 is completely perforated through the monocrystalline silicon substrate 71. Then, the photoresist pattern layer is removed.

[0023] In this state, it is determined whether a clog-

ging state (deformed state) is observed in the nozzle 1, the pressure chamber 3, the ink passage 3 and the ink pool (reservoir) 4.

[0024] Next, referring to Fig. 7D as well as Fig. 6, a wafer-type thin vibration plate 5, which is perforated in advance to be adapted to the edge 50, is adhered by a contact bonding process to the back surface of the monocrystalline silicon substrate 71. Then, one actuator 6 made of piezoelectric material sandwiched by metal electrodes is adhered by a contact bonding process to the thin vibration plate 5 in correspondence with each nozzle 1.

[0025] In Fig. 7D, note that it is possible to adhere actuators 6 to a wafer-type thin vibration plate 5 before the wafer-type thin vibration plate 5 is adhered to the back surface of the monocrystalline silicon substrate 71.

[0026] Next, the separation of the units 101b is explained with reference to Figs. 8A and 8B.

[0027] After the process as illustrated in Fig. 7D, the monocrystalline silicon substrate 71 is divided by the edge 50 along the Y-direction into columns of the units 101b, as illustrated in Fig. 8A.

[0028] Next, as illustrated in Fig. 8B, the monocrystalline silicon substrate 71 is cut by a dicing blade (not shown) along the X-direction. As a result, each of the units 101b is completely separated from each other.

[0029] In this state, it is again determined whether a clogging state (deformed state) is observed in each of the units 101b. Then, defective units 101b having a clogging state (deformed state) are scrapped.

[0030] Next, referring to Fig. 9, an ink jet head is constructed by combining two non-defective units 101b-1 and 101b-2. That is, the recessed abutting portion 52 of the non-defective unit 101b-1 abuts against the protruded abutting portion 51 of the non-defective unit 101b-2, while the protruded abutting portion 54 of the non-defective unit 101b-1 abuts against the protruded abutting portion 53 of the non-defective unit 101b-2. In this case, the contact characteristics between the non-defective units 101b-1 and 101b-2 can be improved due to the presence of the reliefs 55 and 56 thereof. Then, the abutting portions of the non-defective units 101b-1 and 101b-2 indicated by arrows X in Fig. 9 are filled with adhesives 73, as illustrated in Fig. 10.

[0031] Finally, electrical connections are formed on the back surface of the combined units 101b-1 and 101b-2, and the ink supply holes 21 and 22 thereof are coupled to individual ink tanks for black ink, yellow ink, cyan ink and magenta ink, respectively.

[0032] The combination of the units 101b-1 and 101b-2 can be carried out without an expensive alignment apparatus, which would decrease the manufacturing cost.

[0033] Also, since the abutting portions 51, 52, 53 and 54 are formed by a photolithography and etching process, not a dicing blade, the accuracy of the distance between the edge 50 of the abutting portions 51, 52, 53 and 54 and the nozzles 1 of each of the combined units 101b-1 and 101b-2 can be high, i.e., about $\pm 1 \mu$ m. As

a result, the accuracy of the alignment of the nozzles 1 between the combined units 101b-1 and 101b-2 can be high, i.e., about $\pm 5 \mu\text{m}$. Note that, if the abutting portions 51, 52, 53 and 54 are formed by a dicing blade, the above-mentioned distance accuracy may be $\pm 6 \mu\text{m}$, and the above-mentioned alignment accuracy may be $\pm 10 \mu\text{m}$.

[0034] Thus, the deviation of droplets among black ink, yellow ink, cyan ink and magenta ink can be decrease, which could not degrade the printing quality.

[0035] In the above-described embodiment, one ink jet head is constructed by two combined units 101b-1 and 101b-2; however, one ink jet head can be constructed by three or more combined units. For example, if one unit is formed for one nozzle column, one ink jet head can be constructed by four combined units.

[0036] Also, in the above-described embodiment, the substrate 71 is made of monocrystalline silicon; however, the substrate 71 can be made of other crystal or metal. If the substrate 71 is made of metal, a mechanical pressing process or an electroforming process can be performed thereon, so that the nozzles 1 and the like can be formed.

[0037] Further, in the above-described embodiment, the nozzles 1 are arranged in a matrix in each of the nozzle columns 11 and 12; however, the arrangement of the nozzles 1 can be staggered in each of the nozzle columns 11 and 12.

[0038] As explained hereinabove, according to the present invention, since one ink jet head is constructed by a plurality of combined units, the manufacturing yield of each unit is increased, so that the manufacturing yield of the ink jet head can be increased, which would decrease the manufacturing cost.

Claims

1. An ink jet head comprising a plurality of combined units (101b-1, 101b-2).

2. The ink jet head as set forth in claim 1, wherein each of said units comprises:

a first protruded abutting portion (51);
a recessed abutting portion (52) positioned at an opposite side of said first protruded abutting portion and adapted to said first protruded abutting portion;
a second protruded abutting portion (53) on the same side of said first protruded abutting portion; and
a third protruded abutting portion (54) positioned on an opposite side of said second protruded abutting portion and adapted to said second protruded abutting portion.

3. The ink jet head as set forth in claim 2, wherein the

recessed abutting portion and the third protruded abutting portion of one of said units abuts against the first and second protruded abutting portions, respectively, of another of said units.

4. The ink jet head as set forth in claim 1, 2 or 3, wherein said units comprises:

a silicon substrate (71) where nozzles (1), pressure chambers (2), ink passage (3) and ink pools (4) are formed;
a vibration plate (5) fixed to said silicon substrate to partition said pressure chambers and said ink passages and said ink pools; and
actuators (6), fixed to said vibration plate, each for vibrating a portion of said vibration plate corresponding to one of said nozzles.

5. A method for manufacturing an ink jet head, comprising the steps of:

forming a plurality of units (101b) in a substrate (102);
separating said units from each other; and
forming one ink jet head by combining at least two of said units.

6. The method as set forth in claim 5, wherein said unit forming step comprises the steps of:

forming edge portions (50) along a first direction and nozzles (1) in said substrate (71), said edges dividing said units;
forming pressure chambers (2), ink passages (3) and ink pools (4) in said substrate;
adhering a vibration plate (5) to said substrate to partition said pressure chambers, said ink passages and said ink pools; and
adhering actuators (6) to said vibration plate.

7. The method as set forth in claim 6, wherein said edge and nozzle forming step uses a photolithography and dry etching process.

8. The method as set forth in claim 6 or 7, wherein said pressure chamber, ink passage and ink pool forming step uses a photolithography and anisotropic etching process.

9. The method as set forth in claim 6, 7 or 8, wherein said separating step comprises a step of cutting said substrate by a dicing blade along a second direction perpendicular to said first direction.

10. The method as set forth in claim 5, 6, 7, 8 or 9, wherein said unit forming step comprises the steps of:

forming edge portions (50) along a first direc-

tion and nozzles (1) in said substrate (71), said edges dividing said units; forming pressure chambers (2), ink passages (3) and ink pools (4) in said substrate; preparing a vibration plate (5) to which actuators (6) are adhered in advance; and adhering said vibration plate to said substrate to partition said pressure chambers, said ink passages and said ink pools.

10

11. The method as set forth in claim 10, wherein said edge and nozzle forming step uses a photolithography and dry etching process.
12. The method as set forth in claim 10 or 11, wherein said pressure chamber, ink passage and ink pool forming step uses a photolithography and anisotropic etching process.
13. The method as set forth in claim 10, 11 or 12, wherein said separating step comprises a step of cutting said substrate by a dicing blade along a second direction perpendicular to said first direction.
14. The method as set forth in any one of claims 5 to 13, wherein each of said units comprises:
- a first protruded abutting portion (51);
a recessed abutting portion (52) positioned at an opposite side of said first protruded abutting portion and adapted to said first protruded abutting portion;
a second protruded abutting portion (53) on the same side of said first protruded abutting portion; and
a third protruded abutting portion (54) positioned on an opposite side of said second protruded abutting portion and adapted to said second protruded abutting portion.
15. The method as set forth in claim 14, wherein said ink jet head forming step abuts the recessed abutting portion and the third protruded abutting portion of one of said units against the first and second protruded abutting portions, respectively, of another of said units.

50

55

Fig. 1

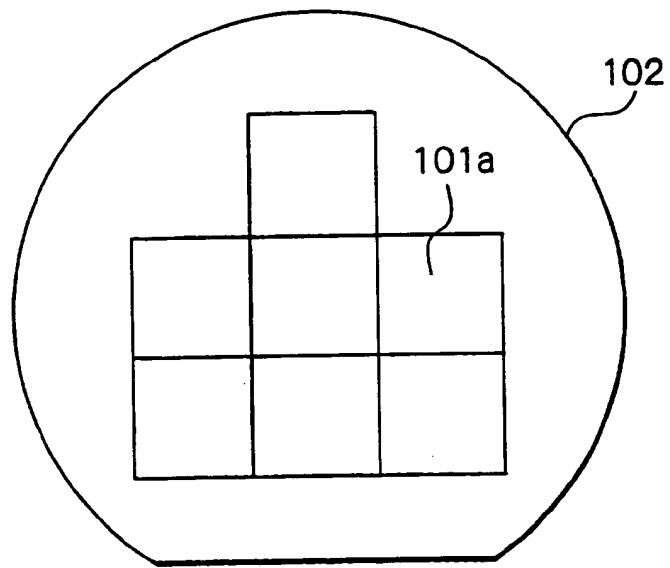


Fig. 2

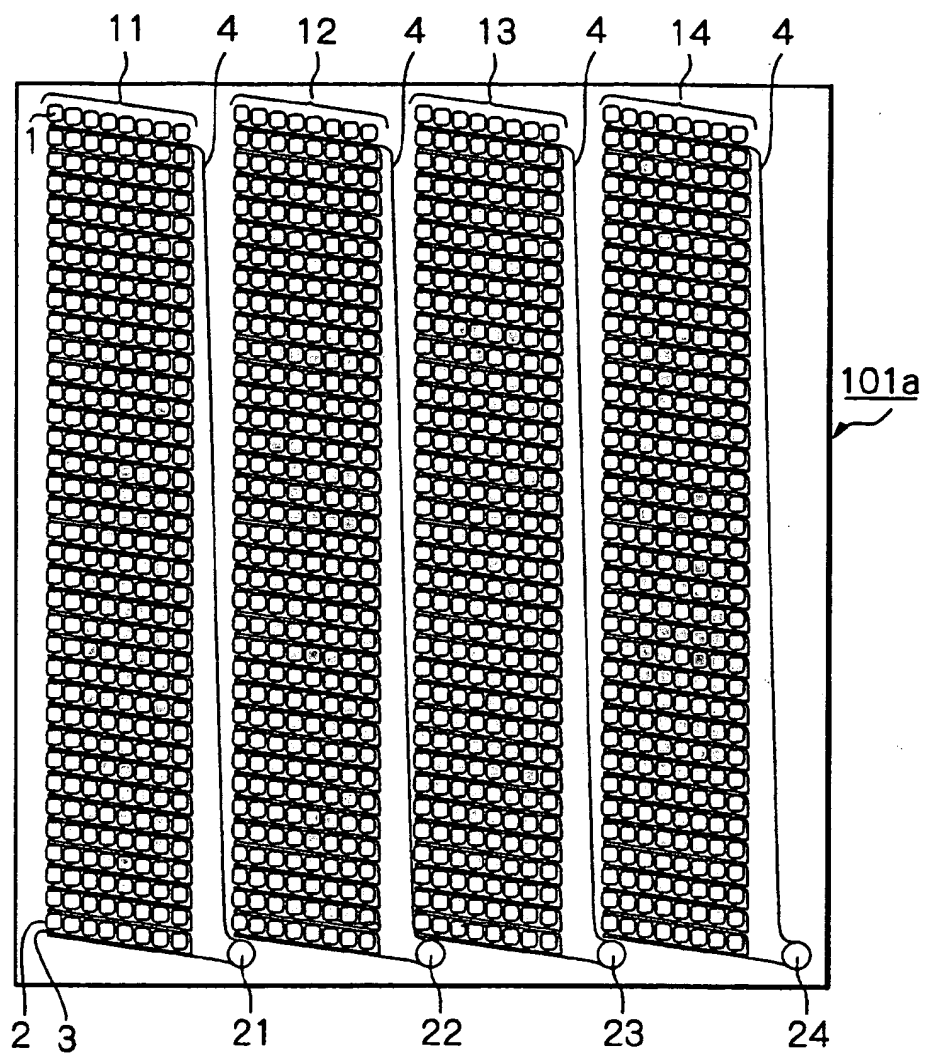


Fig. 3

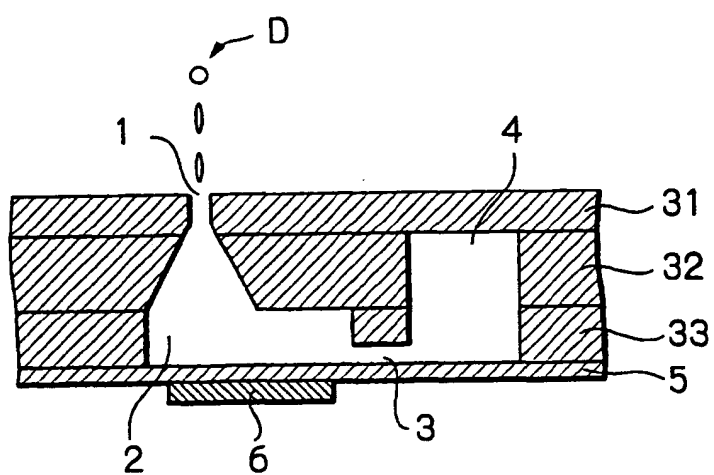


Fig. 4

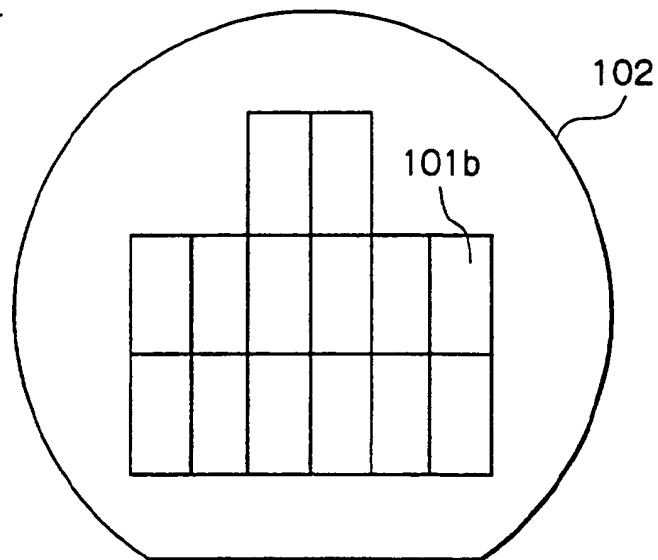


Fig. 5

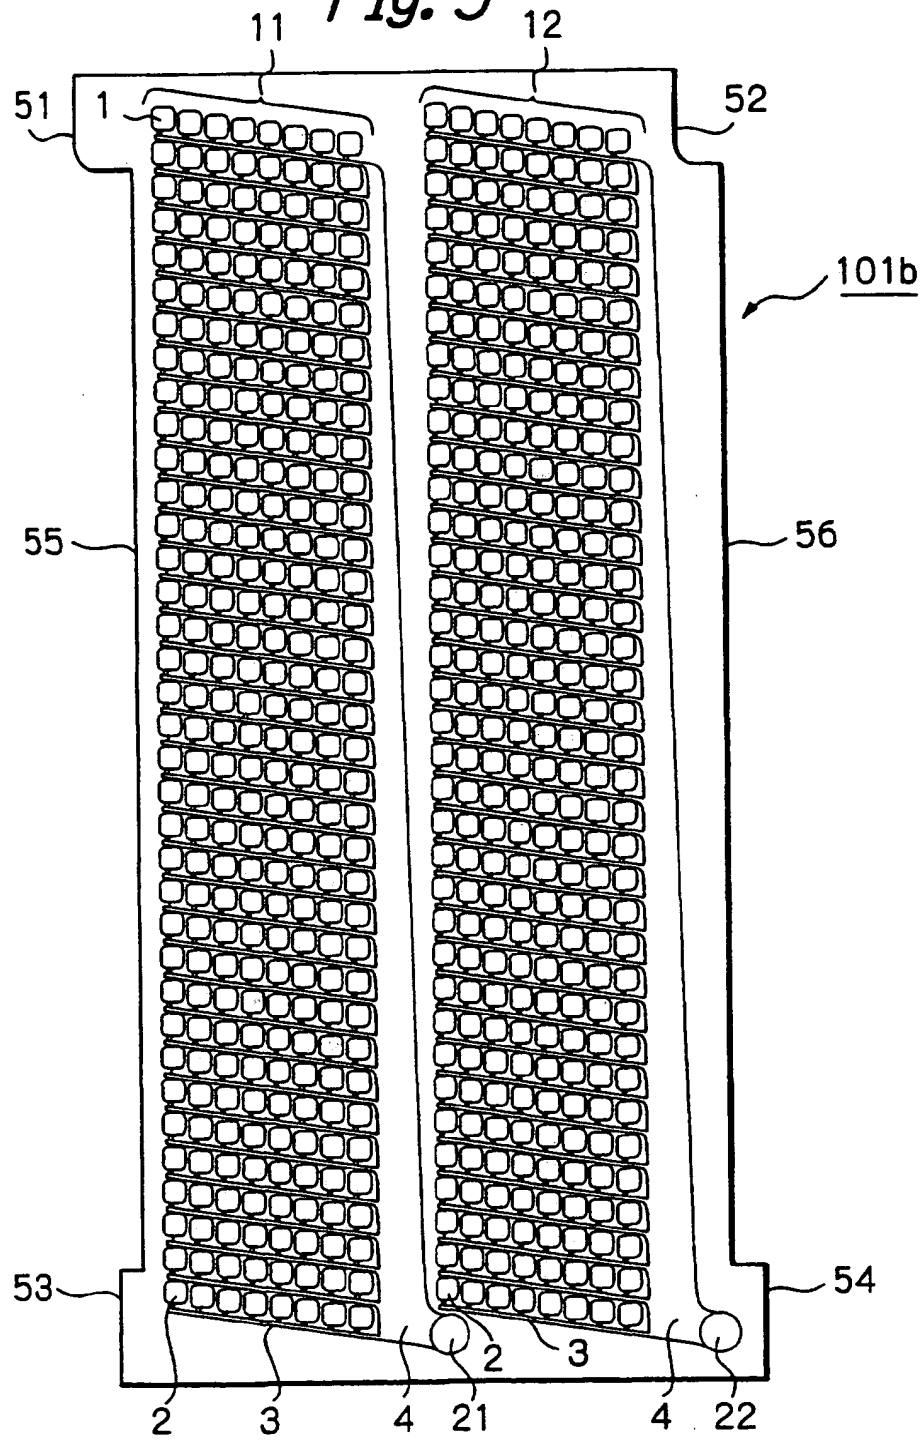


Fig. 6

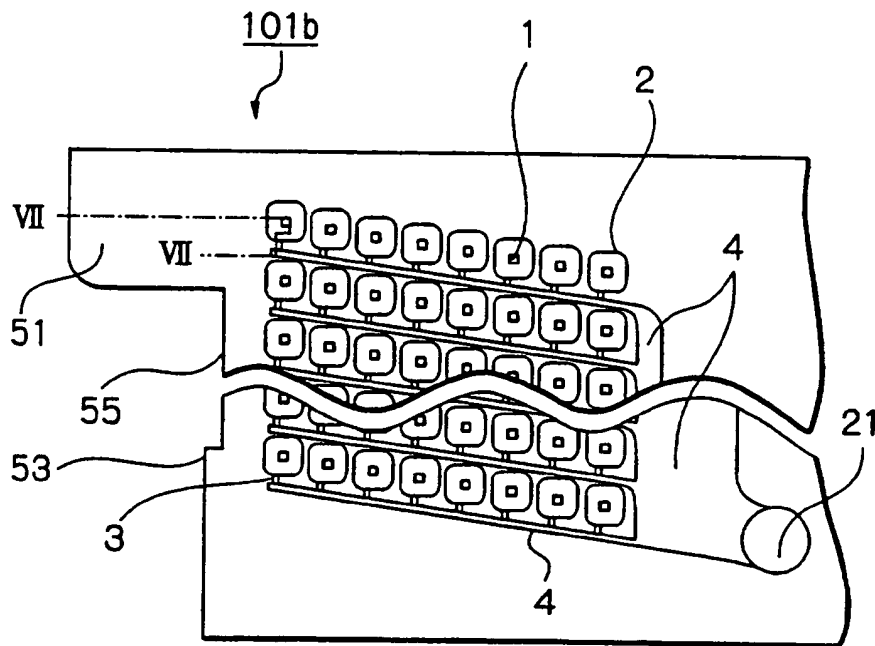


Fig. 7A

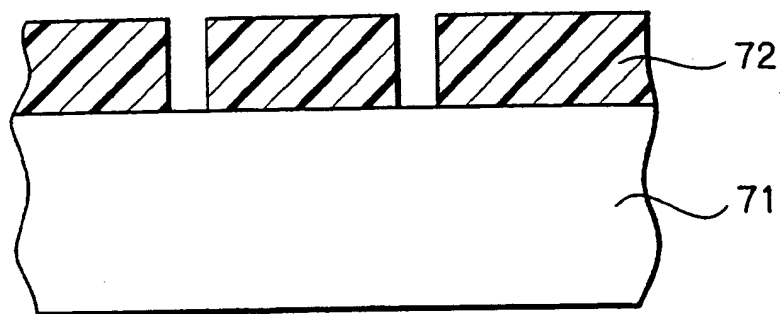


Fig. 7B

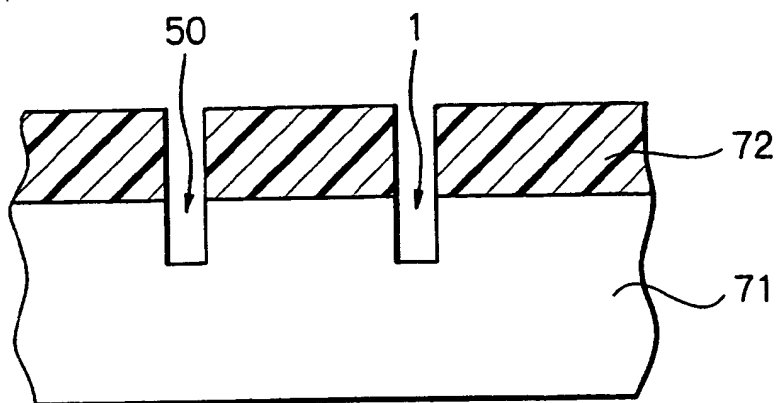


Fig. 7C

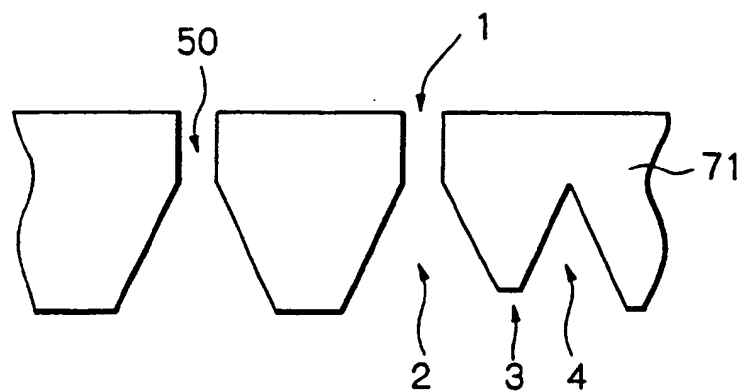


Fig. 7D

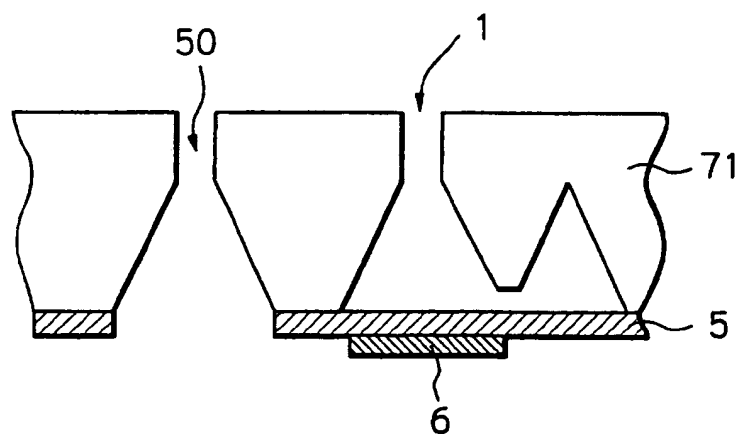


Fig. 8A

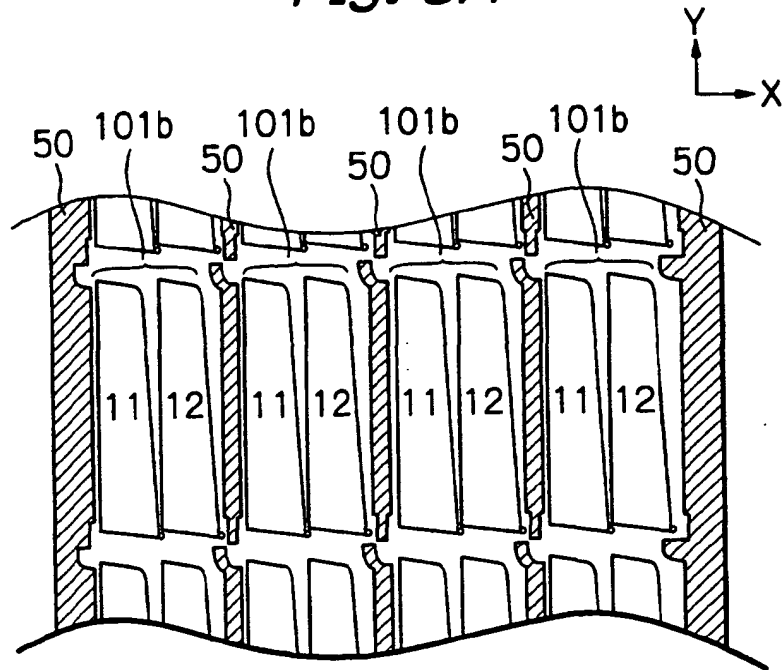


Fig. 8B

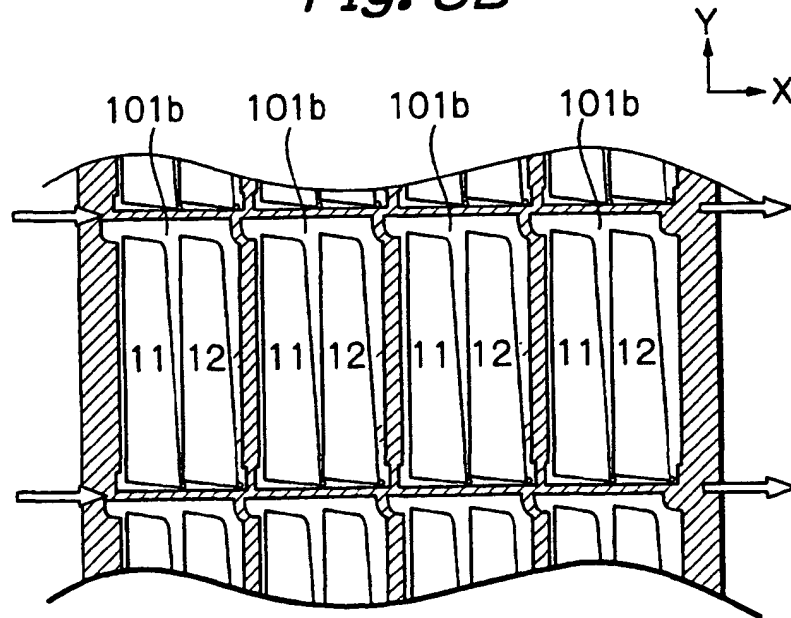


Fig. 9



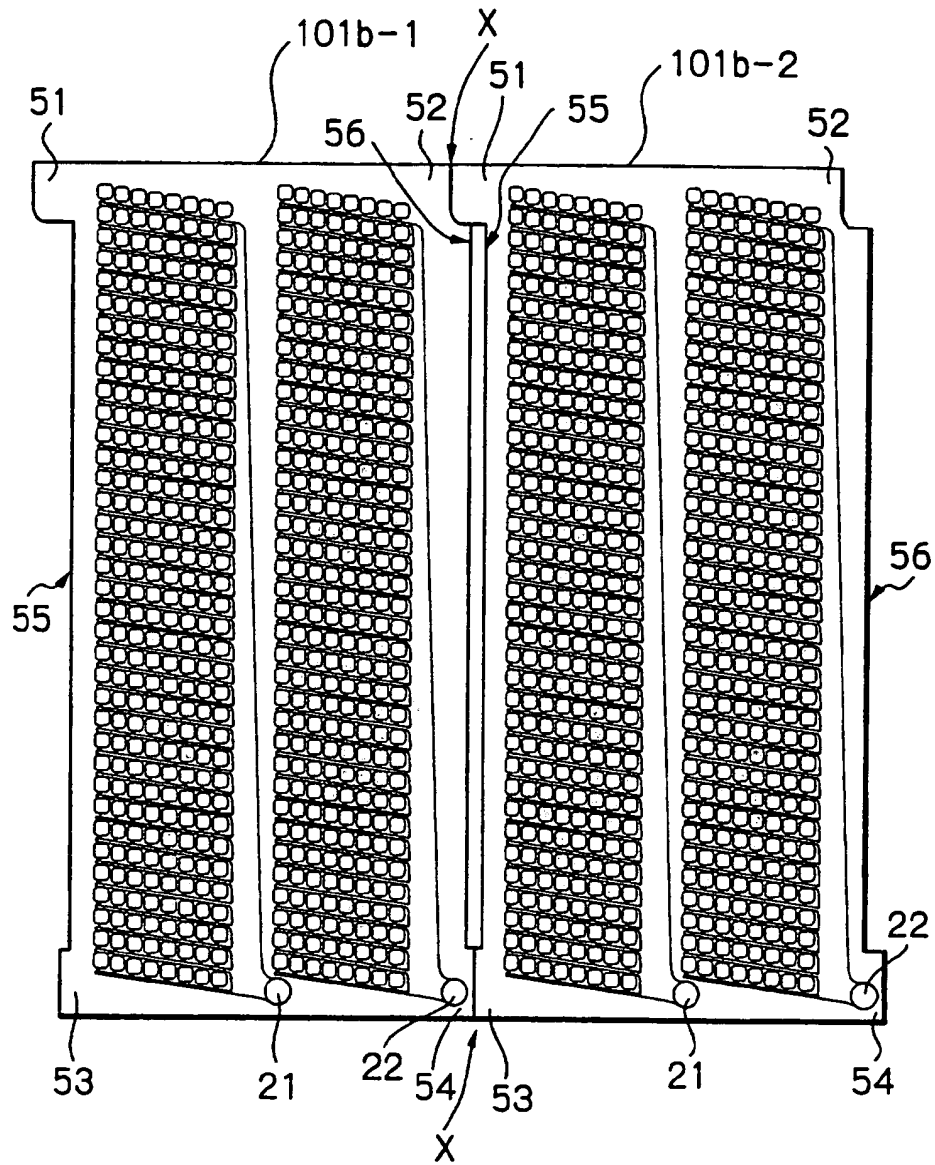


Fig. 10



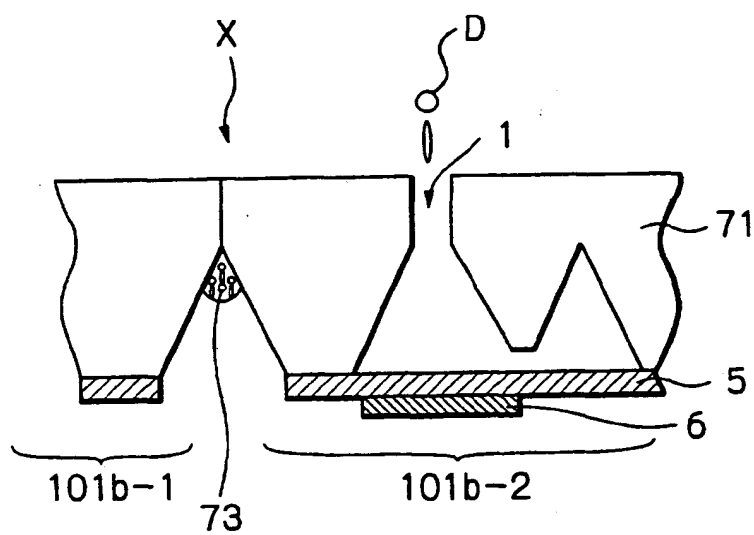

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 136 269 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
04.10.2001 Bulletin 2001/40

(51) Int Cl.7: **B41J 2/14, B41J 2/16,
H01L 21/78**

(43) Date of publication A2:
26.09.2001 Bulletin 2001/39

(21) Application number: **01104029.2**

(22) Date of filing: **20.02.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Kanda, Torahiko**
Minato-ku, Tokyo (JP)
• **Ohno, Kenichi**
Minato-ku, Tokyo (JP)
• **Otsuka, Yasuhiro**
Minato-ku, Tokyo (JP)

(30) Priority: **21.03.2000 JP 2000078898**

(71) Applicant: **NEC CORPORATION**
Tokyo (JP)

(74) Representative: **VOSSIUS & PARTNER**
Siebertstrasse 4
81675 München (DE)

(54) **Ink jet head having a plurality of units and its manufacturing method**

(57) An ink jet head is constructed by a plurality of combined units (101b-1, 101b-2) comprising the steps of:

forming a plurality of units (101b) in a substrate (102);

separating said units from each other; and

forming one ink jet head by combining at least two of said units,

wherein each of said units comprises:


a first protruded abutting portion (51);

a recessed abutting portion (52) positioned at an opposite side of said first protruded abutting portion and adapted to said first protruded abutting portion;

a second protruded abutting portion (53) on the same side of said first protruded abutting portion; and

a third protruded abutting portion (54) positioned on an opposite side of said second protruded abutting portion and adapted to said second protruded abutting portion.

Fig. 9

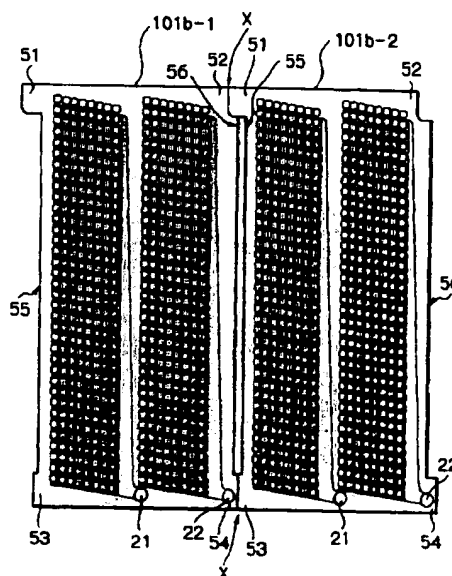

EP 1 136 269 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 10 4029

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 572 244 A (NGUYEN HUNG C ET AL) 5 November 1996 (1996-11-05) * figures 9,10 *	1	B41J2/14 B41J2/16 H01L21/78
X	DE 197 43 804 A (POLITRUST AG) 8 April 1999 (1999-04-08) * figures 3-5,7 *	2	
X	EP 0 771 657 A (EASTMAN KODAK CO) 7 May 1997 (1997-05-07) * page 31, line 7 - line 31; figures 26-28 *	2	
X	US 5 521 125 A (ORMOND BRIAN T ET AL) 28 May 1996 (1996-05-28) * column 1, line 8 - line 21; figure 1 *	5	
Y	DE 42 01 923 A (FUJI ELECTRIC CO LTD) 6 August 1992 (1992-08-06) * figure 1 *	4	
Y	US 5 723 053 A (KATAKURA TAKAHIRO ET AL) 3 March 1998 (1998-03-03) * figure 45 *	4-15	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B41J H01L
Y	US 5 850 240 A (KUBATZKI RALF ET AL) 15 December 1998 (1998-12-15) * the whole document *	4-15	
Y	EP 0 339 912 A (XEROX CORP) 2 November 1989 (1989-11-02) * the whole document *	5-15	
Y	US 5 160 403 A (FISHER ALMON P ET AL) 3 November 1992 (1992-11-03) * the whole document *	5-15	
		-/--	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 3 August 2001	Examiner Bridge, S
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03/02) (P4/C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 10 4029

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	EP 0 370 776 A (XEROX CORP) 30 May 1990 (1990-05-30) * the whole document *	5-15	
A	US 5 469 199 A (ALLEN ROSS R ET AL) 21 November 1995 (1995-11-21) * the whole document *	2,3	
A	EP 0 666 174 A (HEWLETT PACKARD CO) 9 August 1995 (1995-08-09) * the whole document *	2,3	
A	US 5 719 605 A (ANDERSON FRANK EDWARD ET AL) 17 February 1998 (1998-02-17) * the whole document *	5-15	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 3 August 2001	Examiner Bridge, S
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 4029

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-08-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5572244 A	05-11-1996	NONE	
DE 19743804 A	08-04-1999	NONE	
EP 0771657 A	07-05-1997	JP 9164685 A	24-06-1997
US 5521125 A	28-05-1996	NONE	
DE 4201923 A	06-08-1992	JP 4251750 A	08-09-1992
		FR 2676022 A	06-11-1992
US 5723053 A	03-03-1998	JP 3141652 B	05-03-2001
		JP 7132595 A	23-05-1995
		JP 7125198 A	16-05-1995
		JP 7166374 A	27-06-1995
		JP 7178908 A	18-07-1995
		JP 7178909 A	18-07-1995
		JP 7276625 A	24-10-1995
		JP 7323543 A	12-12-1995
		JP 8025631 A	30-01-1996
		EP 0652108 A	10-05-1995
		EP 0980755 A	23-02-2000
		EP 0980759 A	23-02-2000
		EP 0980756 A	23-02-2000
		EP 0980757 A	23-02-2000
		SG 65556 A	22-06-1999
		SG 75129 A	19-09-2000
		SG 75130 A	19-09-2000
		SG 75131 A	19-09-2000
		SG 75132 A	19-09-2000
		US 5956058 A	21-09-1999
US 5850240 A	15-12-1998	DE 4443254 C	21-12-1995
		DE 59507996 D	20-04-2000
		EP 0713777 A	29-05-1996
EP 0339912 A	02-11-1989	US 4822755 A	18-04-1989
		DE 68918982 D	01-12-1994
		DE 68918982 T	27-04-1995
		JP 1313956 A	19-12-1989
		JP 1826118 C	28-02-1994
		JP 5032905 B	18-05-1993
US 5160403 A	03-11-1992	JP 2597447 B	09-04-1997
		JP 5201006 A	10-08-1993

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 4829

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-08-2001

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0370776	A	30-05-1990	US 4878992 A	07-11-1989
			DE 68918410 D	27-10-1994
			DE 68918410 T	29-06-1995
			JP 2184451 A	18-07-1990

US 5469199	A	21-11-1995	US 5305018 A	19-04-1994
			CA 2082850 A	03-10-1993
			DE 69306150 D	09-01-1997
			DE 69306150 T	20-03-1997
			EP 0564102 A	06-10-1993
			ES 2095005 T	01-02-1997
			HK 61297 A	16-05-1997
			JP 6008446 A	18-01-1994
			KR 225705 B	15-10-1999
			US 5600354 A	04-02-1997
			US 5408738 A	25-04-1995
			US 5442384 A	15-08-1995
			US 5291226 A	01-03-1994
			US 5305015 A	19-04-1994
			DE 69111936 D	14-09-1995
			DE 69111936 T	11-04-1996
			EP 0471157 A	19-02-1992
			HK 158996 A	30-08-1996
			JP 4226765 A	17-08-1992

EP 0666174	A	09-08-1995	US 5565900 A	15-10-1996
			DE 69515537 D	20-04-2000
			DE 69515537 T	14-12-2000
			JP 7251505 A	03-10-1995

US 5719605	A	17-02-1998	AU 715596 B	03-02-2000
			AU 4280997 A	28-05-1998
			EP 0845359 A	03-06-1998
			JP 10181029 A	07-07-1998

CHM 11489

EPO FORM 1148B

For more details about this annex : see Official Journal of the European Patent Offices, No. 12/82